

Tank Level Sensors

PROTEUS-B Series

Automatic Tank Gauging and Leak Detection System



KEY FEATURES

- Accepts up to 4 or 8 magnetostrictive probes
- Accepts up to 16 Bright Eye sensors
- Sensors networked using state of the art four-wire bus technology
- 1 RS-232 port
- External expansion port
- Compact footprint
- VLD standard
- Low Cost

OPTIONS

- Remote display
- Modbus
- CITLD upgradeable
- OMNTEC PC software

A brighter future in tank gauging and leak detection has arrived with the PROTEUS Series. Featuring advanced technology, versatility, scalability, and enhanced features like our 7-inch color touch screen. The PROTEUS Series can simultaneously monitor product levels, water levels, temperature, leaks, and much more. The flexibility of PROTEUS makes it ideal for a variety of gauging and leak detection applications.

Our economical version of the PROTEUS Series is OEL8000III-B. It offers limited features for a low cost solution to gauging, leak detection, and meeting compliance requirements.

The OEL8000III-B accepts up to 16 of OMNTEC's Bright Eye™ (BX Series) sensors for distinguishing product from water or for simply detecting the presence of liquid. A distinct advantage of Bright Eye sensors is they are networked and utilize 4-wire bus technology.

PROTEUS does not require sensor or probe input modules, bringing ease to ordering and installation. A built in microprocessor gives each sensor the ability to identify itself and its location, which is displayed along with alarm conditions on the PROTEUS's touch screen.

With OMNTEC's proven reliability, the PROTEUS offers an attractive, comprehensive, and user-friendly system that can open doors to endless possibilities.

Electrical

Input Power	100-240 VAC +/- 10% 50/60 Hz 60 watts
Voltage to Sensors	12 VDC
Voltage to Probes	28 VDC

Audio Visual Controls

Display	Color 7-inch graphic display with touch screen
Audible alarm	85 dB piezoelectric horn
System status	3 LED's (OK, fault, alarm)

Operating Temperature 20 to 140° F (-7° to 60° C)

Compatible Sensors BX-Series sensors (refer to document no. 900106)

BX-Series Sensor Cable Shielded 22 AWG with drain wire (OMNTEC EC-4), Maximum length 2,000 feet (610m)

Compatible Probes

- Rigid Gauging Probe
- MTG-4* (1219mm)
- MTG-6* (1829mm)
- MTG-8* (2438mm)
- MTG-10* (3048mm)
- Flexible Fixed Top Probe
- MTG-F-* Series
- Flexible Fixed Bottom Probe
- MTG-FB-* Series

MTG Probe Cable OMNTEC EC-2 (Shielded Belden #8761)
 Low Inductance: equal or less than .2 microhenries per foot
 Maximum length 1,000 feet (305m)**

Accessories RD7CTS Remote display

Weight 20 lb. (9kg)

Dimensions 7 x 8 x 5 (H x W x D) inches


Approvals



* Number signifies shaft length and corresponds to tank diameter. Contact representative for additional lengths.

** Consult representative for longer wire runs.

Dimensions may vary slightly. Specifications subject to change without notice, verify with manufacturer.

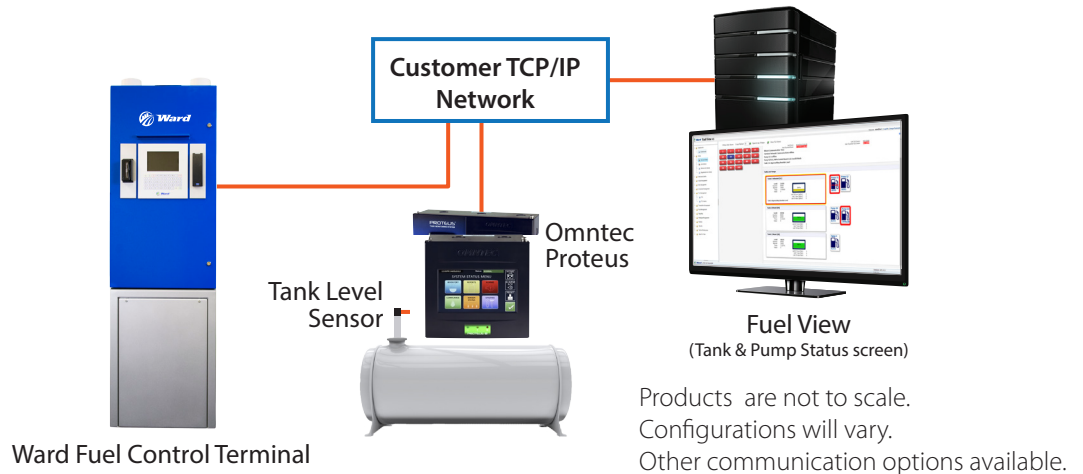

Proteus B with Ward FCT and Fuel View Software



8801 Tradeway
 San Antonio, TX 78217
 210.824.7383 | 800.580.WARD
 info@ejward.com • www.ejward.com