

Tank Level Sensors

PROTEUS-K Series

Automatic Tank Gauging and Leak Detection System



A brighter future in tank gauging and leak detection has arrived with the PROTEUS Series. Featuring advanced technology, versatility, scalability, and enhanced features like our 7-inch color touch screen. The PROTEUS-K Series can simultaneously monitor product levels, water levels, temperature, leaks, and much more in up to eight tanks. The flexibility of PROTEUS makes it ideal for a variety of gauging and leak detection applications.

The PROTEUS OEL8000IIK accepts up to 16 of OMNTEC's Bright Eye™ (BX Series) sensors for distinguishing product from water or for simply detecting the presence of liquid. A distinct advantage of Bright Eye sensors is they are networked and utilize 4-wire bus technology.

PROTEUS does not require sensor or probe input modules, bringing ease to ordering and installation. A built in microprocessor gives each sensor the ability to identify itself and its location, which is displayed along with alarm conditions on the display screen.

With OMNTEC's proven reliability, the PROTEUS offers an attractive, comprehensive, and user-friendly system that can open doors to endless possibilities.

KEY FEATURES

- Accepts up to eight magnetostrictive probes
- Accepts up to 16 Bright Eye sensors
- Three built-in programmable relays
- Up to eight additional dry contact relays
- Large user friendly icons
- Easy to read leak and level alarms
- SD memory card slot (for extended logging)
- Ethernet/TCP/IP
- Built in web server
- E-mail and text capability
- SIL rated operating system
- VLD standard
-
- Flash based non-volatile memory for program storage (battery not required)
- Compatible with OMNTEC PC remote tank inventory monitoring

OPTIONS


- Remote display
- 36-character thermal printer
- 1 RS-485 port
- Modbus RTU & TCP upgrade
- CITLD upgrade
- OMNTEC PC software

Electrical	Input	100-240 VAC \pm 10% 50/60 Hz 60
	Voltage to Sensors	12 VDC
	Voltage to Probes	28 VDC
	Relay Outputs	120 VAC @ 0.6 amp resistive 3 SPST Failsafe
	Low-voltage Outputs	12 VDC @ 150 mA
Audio Visual Controls	Display	7-inch color graphic display touch screen
	Audible alarm	85 dB piezoelectric horn
	Printer	36 character; thermal
	System status	3 LED's (OK, warning, alarm)
Operating Temperature	20 to 140° F (-7° to 60° C)	
Compatible Sensors	BX-Series sensors	
BX-Series Sensor Cable	Shielded 22 AWG with drain wire (OMNTEC EC-4) Maximum length 2,000 feet (610m)	
Compatible Probes	Rigid Gauging Probe	
	MTG-4* (1219mm) MTG-6* (1829mm) MTG-8* (2438mm) MTG-10* (3048mm)	
	Flexible Fixed Top Probe (refer to document no. 900166)	
	MTG-F-* Series	
	Flexible Fixed Bottom Probe MTG-FB-* Series	
MTG Probe Cable	OMNTEC EC-2 (Shielded Belden #8761) Low Inductance equal or less than 0.2 microhenries per ft Maximum length 1,000 feet (305m)**	
Accessories	RD7CTS	Mini-Me remote display
	RAS Series	Remote annunciators
	PS-103	Thermal printer
	DPU-C	Thermal paper
	XC-R8	External relay expansion
	X232-420	External RS-232 to 4-20 ma converter
	DB-485	RS-485 board
Weight	20 lb. (9kg)	
Dimensions	7 x 15 x 5 inches (H x W x D)	
Approvals	UL; CUL	

Dimensions may vary slightly. Specifications subject to change without notice, verify with manufacturer.

* Number signifies shaft length and corresponds to tank diameter. Contact representative for additional lengths.

** Consult representative for longer wire runs.

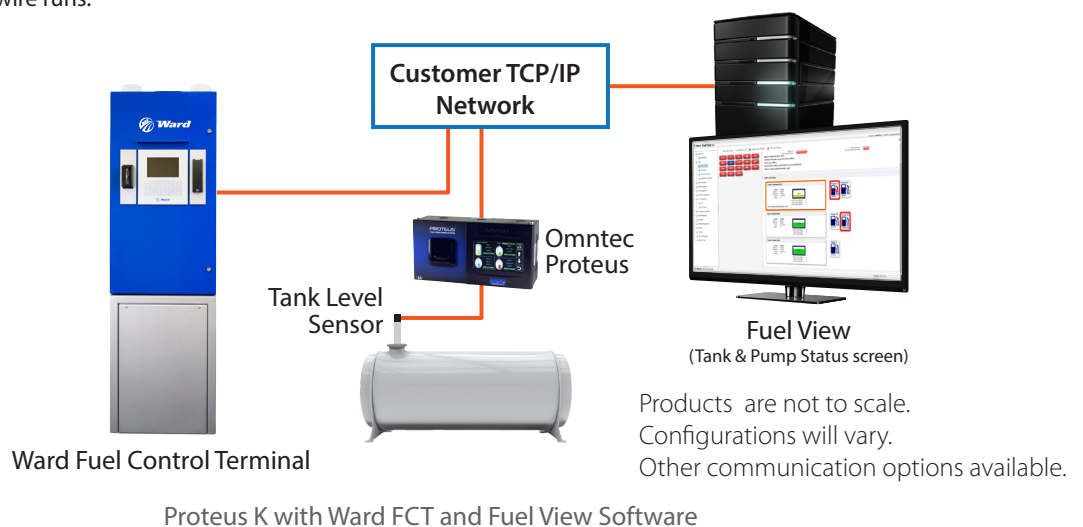

8801 Tradeway
San Antonio, TX 78217
210.824.7383 | 800.580.WARD
info@ejward.com • www.ejward.com

Proteus K with Ward FCT and Fuel View Software